



Working Height: 20.1m



Maximum Outreach: 9.7m



Cage Capacity: 2 or SWL



Safe Working Load: 230kgs



GVW: 2,940kgs




**IPAF Category 1B** 


The compact travel dimensions and light weight of this machine, make it perfect for both indoor and outdoor use. It will reach exactly where you expect it to, even with two normal weight occupants in the cage. It is an ideal tool for jobs such as building maintenance and tree work.



This superb machine incorporates all the features you need for everyday, real life work without any complications. It has a 20.1m working height and 9.7m horizontal working outreach, but unlike many competitors the full maximum SWL of 230kg is available at all points within the working envelope.

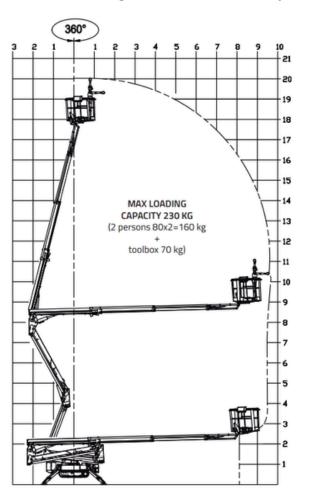

Max Working Height: 20.1m
Max Horizontal Outreach: 9.7m
Max platform capacity / occupants:
230kg / 2 persons
Outreach at max. SWL: 9.7m
Max lateral slope when travelling:
16 degrees

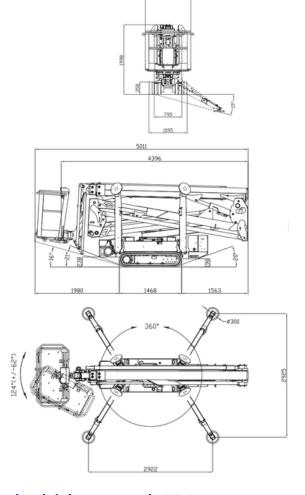

Travel width stowed: 790mm
Travel length stowed: 4.4m
Travel height stowed: 2.0m
Minimum travel width with
cage removed: 0.80m

Weight: 2,940kg

Power source: Diesel / 240V AC









**NEWCASTLE: 0191 236 7120**