
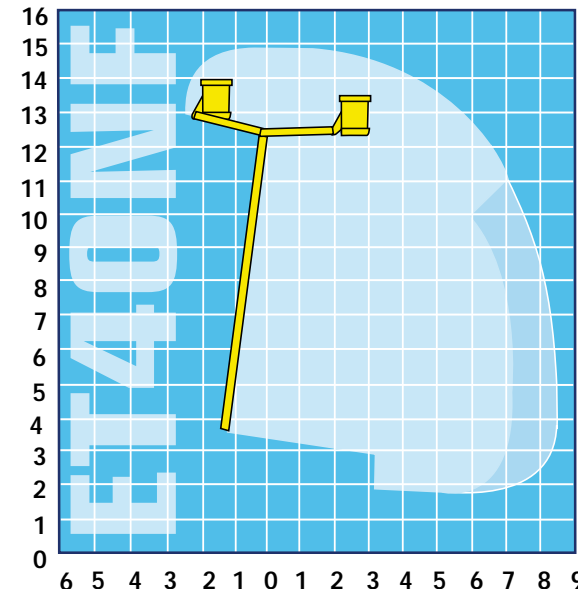
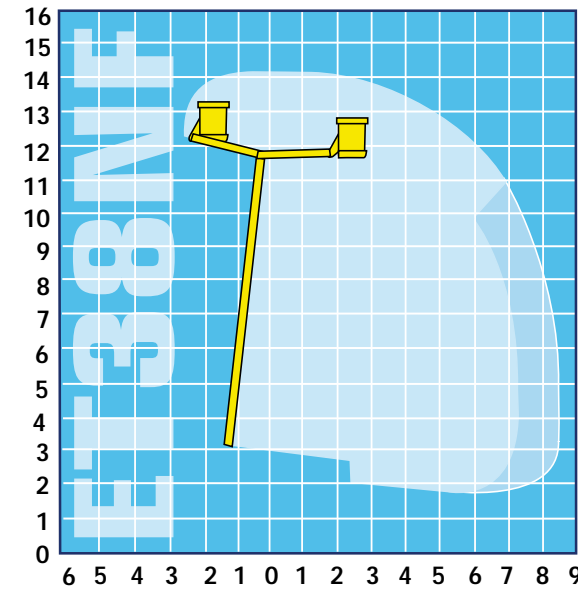
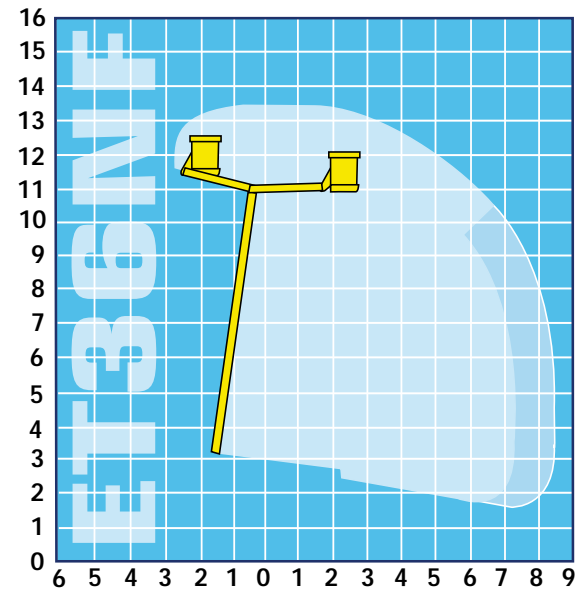


VERSALIFT

Eurotel

ET32NF • 36NF • 38NF • 40NF

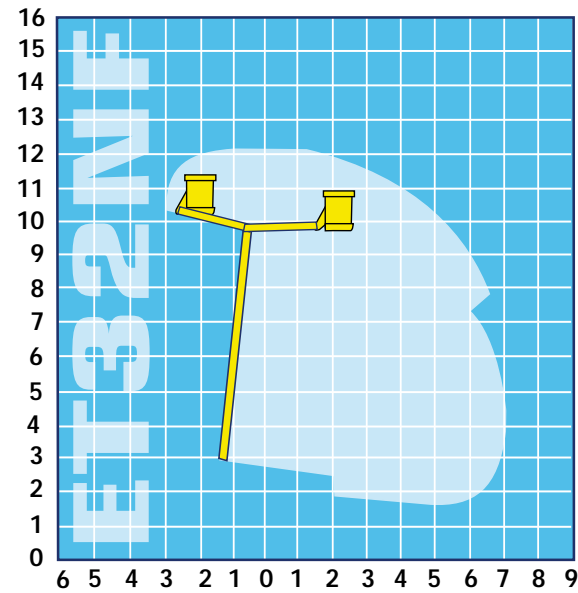

specifications

| | ET32NF | ET36NF | ET38NF | ET40NF |
|------------------------------|-----------------------------|------------|------------|------------|
| max. working height | 12.2m | 13.2m | 14.2m | 15.0m |
| max. platform height | 10.2m | 11.2m | 12.2m | 13.0m |
| horizontal outreach@200kgSWL | 7.1m | 7.3m | 7.3m | 7.3m |
| horizontal outreach@120kgSWL | n/a | 8.4m | 8.4m | 8.4m |
| fly boom | 110° standard / 180° option | | | |
| non continuous rotation | >360° | >360° | >360° | >360° |
| boom travel | -7° to 80° | -7° to 80° | -7° to 80° | -7° to 80° |
| min. GVW | 4.6t | 4.6t | 4.6t | 4.6t |

Please note that SWL, material handling capabilities, outreach and working height vary according to specification of platform and base vehicle. Above figures are intended as best guide only. Versalift is certified to ISO9001: 2000 by TUV UK Quality Assurance Ltd; certificate number GB00468.

All dimensions in metres

- Reach of ET32/36/38/40NF (1 man)
- Reach of ET32/36/38/40NF (2 man)



Eurotel

ET32NF • 36NF • 38NF • 40NF
4.6 tonne and above full function platforms



Telescopic boom models



110° flyboom



Up to 15.0m



Up to 7.3m



GVW vehicles



www.versalift.co.uk

1 Altendiez Way, Latimer Park, Burton Latimer, Northants. NN15 5YT
Tel: 01536 721010 Fax: 01536 721111 email: sales@versalift.co.uk

The photographs in this brochure are for promotional purposes only. Specifications are subject to change without notice.

VERSALIFT

Eurotel

ET32NF • 36NF • 38NF • 40NF
eurotel - versatile and compact

The Eurotel NF range from Versalift is the UK's market leading van and chassis mounted access platform. With a low weight to maximise load carrying capacity and compact dimensions thanks to versatile telescopic, plus flyboom configuration. It is the perfect partner for today's latest generation of light commercial vehicles.

Eurotel's are currently in use with most of the worlds leading contractors, utilities and rental companies so you can be confident of a proven, reliable service and an after sales support that is second to none.

Specialist applications of Eurotel models on Daimler Chrysler Unimogs and also Fourtec UK's Bremach Extreme, offering 4 x 4 full off road capacity. All platforms feature a one year parts and labour warranty, with a three year extended warranty and a range of Repair and Maintenance contracts available at extra cost.

Versalift offers extensive customer support - pre sales help and advice and demonstrator units. Full after sales service and spare parts. are usually available within 24hrs. Product service training and IPAF operator courses are also available.



comment

Ready to Go vans (RTG) often in stock, please enquire.



features & benefits

Lightweight platforms for greater spare payload
Greater van payload
ET36NF achieves up to 1000kg spare payload on 4.6 tonne GVW
ET36NF achieves up to 1400kg spare payload on 5.2 tonne GVW
ET38NF achieves up to 670kg spare payload on 4.6 tonne GVW
ET38NF achieves up to 1300kg spare payload on 5.2 tonne GVW
ET40NF achieves up to 1200kg spare payload on 5.2 tonne GVW
Full platform function emergency power
Emergency stop at platform and pedestal

Full functions at ground on 5m wander lead
Aluminium inner telescopic boom
Steel outer boom and pedestal
Van or truck mount
Extended outreach pack ads up to 1m with 120kg SWL
Critical fasteners are torqued and sealed
Twin proportional joystick option

